



# 乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

Address: 721 huancheng east road tantou liushi yueqing wenzhou

Tel: 0577-27878383

website: www.pilotlamp.cn

Fax: 0577-27878383-8027

## SPECIFICATION FOR APPROVAL

### 规格说明书

CUSTOMER'S CODE

本厂代码:

DESCRIPTION

品名: FLM16-10 平头插脚环形轻触自复金属按钮

SPECIFICATION

规格: 16mm

DATE

编制日期:

PART NO.

本厂型号:

REFERENCE No.

档案编号:

Approved By Customer 编制	Qualified By 审核	Form Designer 批准



乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

Address: 721 huancheng east road tantou liushi yueqing wenzhou

Tel: 0577-27878383


website: www.pilotlamp.cn

Fax: 0577-27878383-8027


## 1. 图片 Picture:




## 2. 图纸 drawing

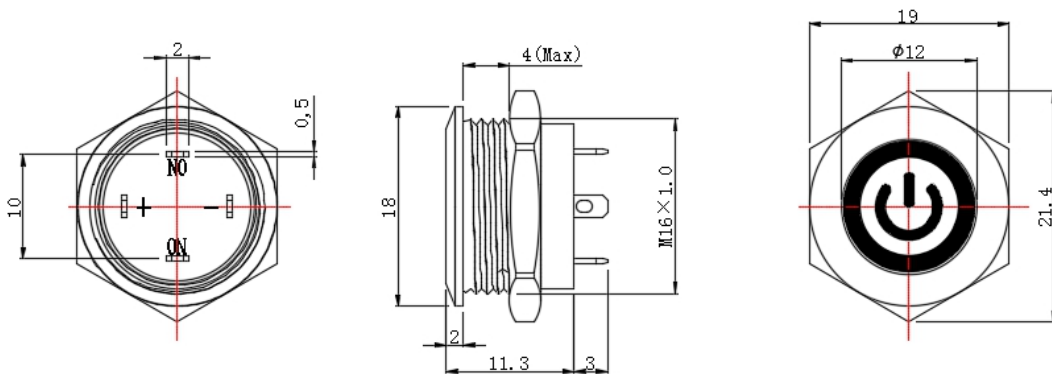

电气简图



安装孔图





# 乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

Address: 721 huancheng east road tantou liushi yueqing wenzhou

Tel: 0577-27878383

website: www.pilotlamp.cn

Fax: 0577-27878383-8027

### 3 配件材料 component material

配 件 名 Component name	材料 material
导光按键	PC 塑料 PC plastic
按键	304 不锈钢 304Stainless steel
外壳套筒	H59黄铜/304不锈钢 H59 nickel plated brass/304Stainless steel
按钮引脚	H62 铜合金
防水圈 rubber ring	SIL 硅胶 SIL silica gel
螺帽 nut	H59 黄铜 H59 nickel plated brass
底座 housing	PA66+GF20%阻燃尼龙 PA66+GF20% nylon
光源 Light source	LED LED 灯
电阻 Resistor	金属膜电阻 Metal film

### 4 性能参数 performance parameter

项目 items	参数 parameter
开关额定电压 Rated voltage	36V DC 250V AC
开关额定电流 rated current	1A DC 0.5A AC
指示灯额定电压	3V-220V
指示灯额定电流	≤20mA
额定功率 rated power	36W(DC) 125W(AC)
绝缘耐压 Insulation and voltage resistance	1500V
接触电阻: Point resistanc:	≤50mΩ ≤50mΩ
绝缘电阻: Isolation resistance:	≥100MΩ ≥100MΩ
机械寿命	50 万次
电气寿命 electrical life	10 万次
工作环境温度 Operating temperature	-25℃~+85℃
防护等级(头部) IP degree	IP65 IK08
指示灯颜色	红蓝绿黄白色