



# 乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

Address: 721 huancheng east road tantou liushi yueqing wenzhou

Tel: 0577-27878383

website: www.pilotlamp.cn

Fax: 0577-27878383-8027

## SPECIFICATION FOR APPROVAL

### 规格说明书

CUSTOMER'S CODE

本厂代码: \_\_\_\_\_

DESCRIPTION

品名: \_\_\_\_\_ FLM12-FW-3 平头带线带灯自复金属按钮

SPECIFICATION

规格: \_\_\_\_\_ 12mm

DATE

编制日期: \_\_\_\_\_

PART NO.

本厂型号: \_\_\_\_\_

REFERENCE No.

档案编号: \_\_\_\_\_

Approved By Customer 编制	Qualified By 审核	Form Designer 批准



乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd


Address: 721 huancheng east road tantou liushi yueqing wenzhou

Tel: 0577-27878383


website: www.pilotlamp.cn

Fax: 0577-27878383-8027


1. 图片 Picture:

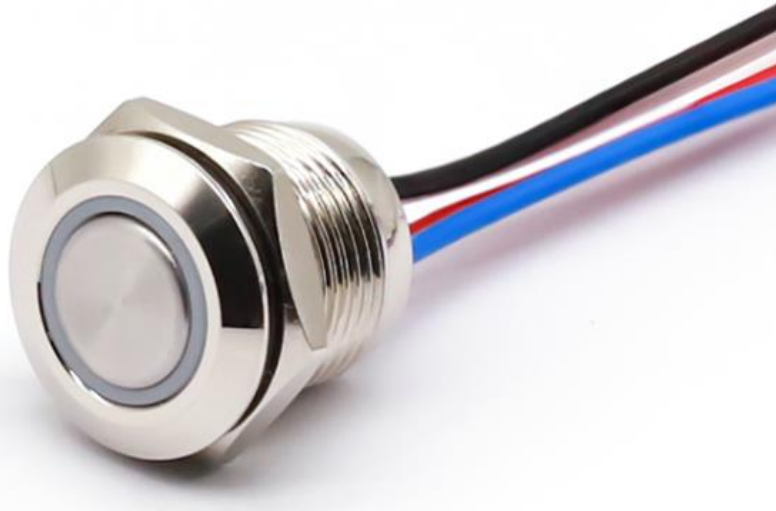


2. 图纸 drawing

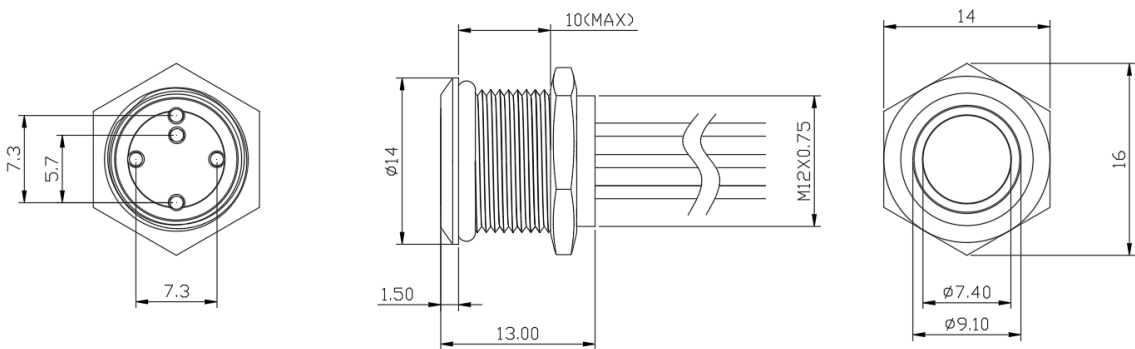

电气简图

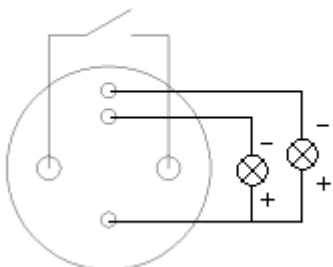

安装孔图

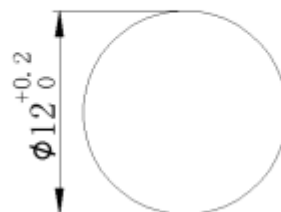

### 3 配件材料 component material

配 件 名 Component name	材料 material
导光按键	PC 塑料 ABS plastic
按键	304 不锈钢 304 Stainless steel
外壳套筒	304 不锈钢 304 Stainless steel
按钮引脚	22AWG PVC 导线(0.3MM <sup>2</sup> )
防水圈 rubber ring	SIL 硅胶 SIL silica gel
螺帽 nut	H59 黄铜 H59 nickel plated brass
底座 housing	PA66 塑料 PA66 plastic
光源 Light source	
电阻 Resistor	

### 4 性能参数 performance parameter

项目 items	参数 parameter
开关额定电压 Rated voltage	12V DC
开关额定电流 rated current	50mA
指示灯额定电压	12V DC
指示灯额定电流	10mA
额定功率 rated power	
绝缘耐压 Insulation and voltage resistance	500V
接触电阻: Point resistanc:	≤50m Ω
绝缘电阻: Isolation resistance:	≥100M Ω
机械寿命	10 万次
电气寿命 electrical life	10 万次
工作环境温度 Operating temperature	-25℃~+85℃
防护等级(头部) IP degree	IP67
指示灯颜色	可选双色