


SPECIFICATIONS

1. Rating	16A 125V AC; 10A 250V AC
2. Contact Resistance	$\leq 50 \text{ m}\Omega$ max
3. Insulation Resistance	$\geq 500\text{V DC } 1000 \text{ M}\Omega$ min
4. Withstand Voltage	$\geq 1500\text{V AC } 1 \text{ Minute}$
5. Operating Temperature	$-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
6. Electrical Life	$\geq 10,000$ Cycles

OUTLINE DRAWING


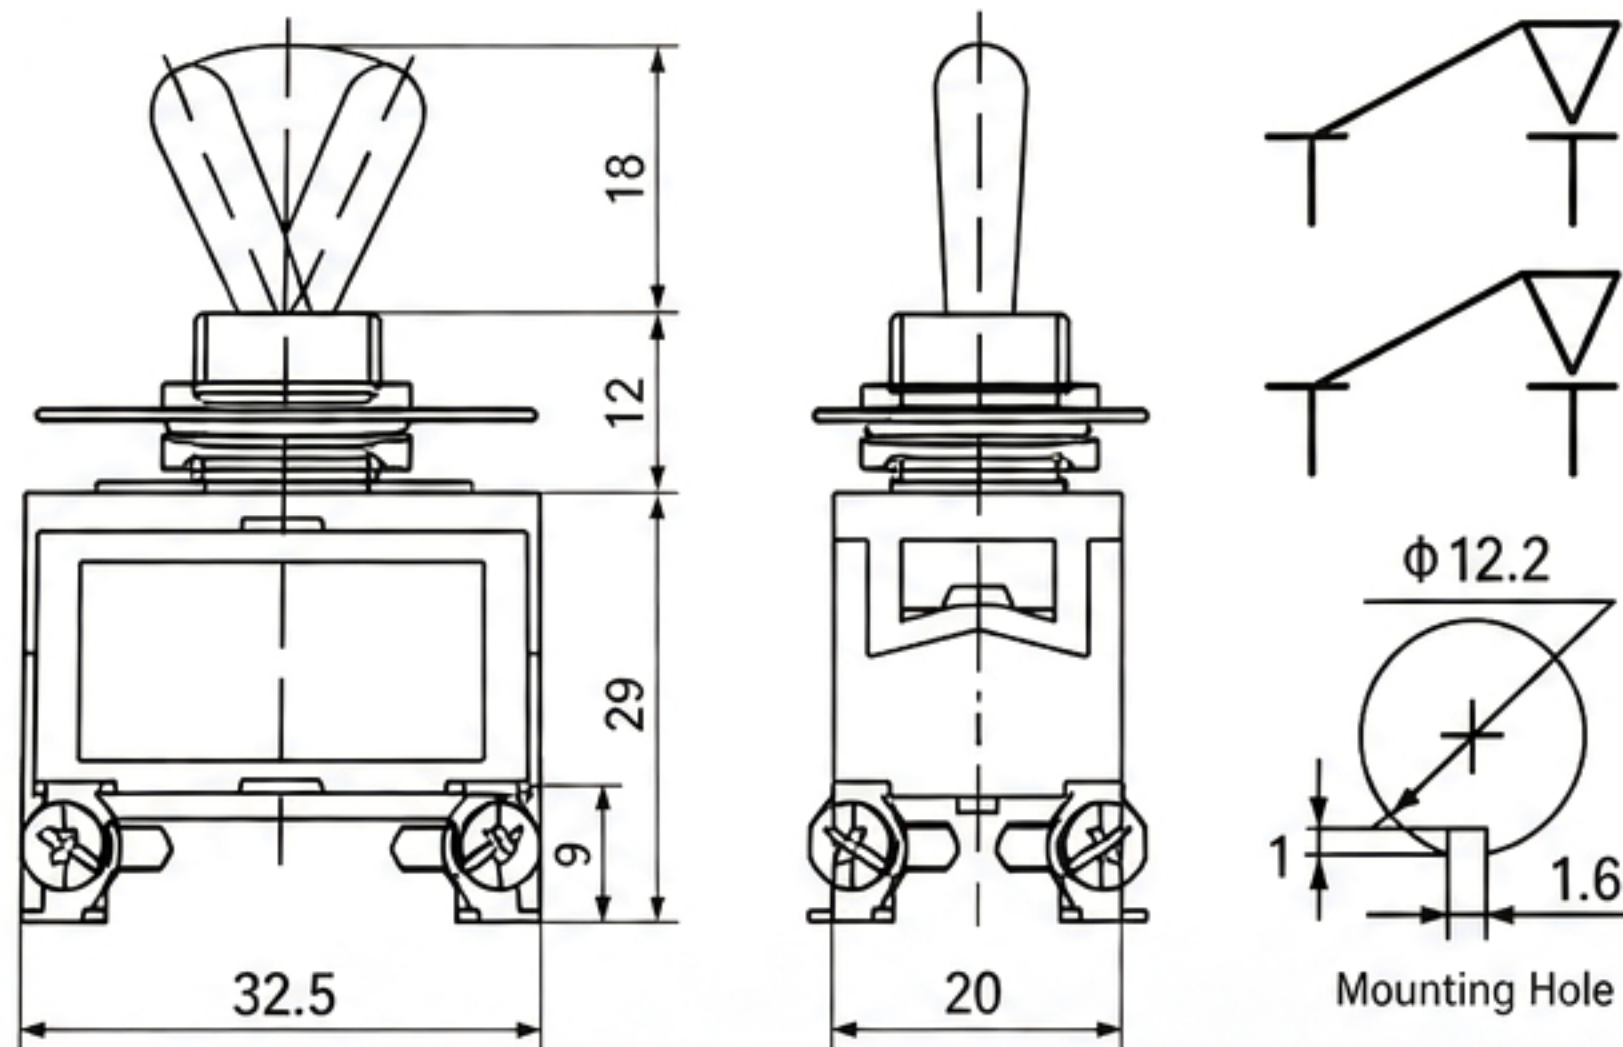


NOTES


- All dimensions are in millimeters (mm)
- Mounting hole size tolerance as per GB/T 1804-m
- For more information, please contact our sales team

WB1-2T-1221S-WP-005

Toggle Switch Waterproof Box

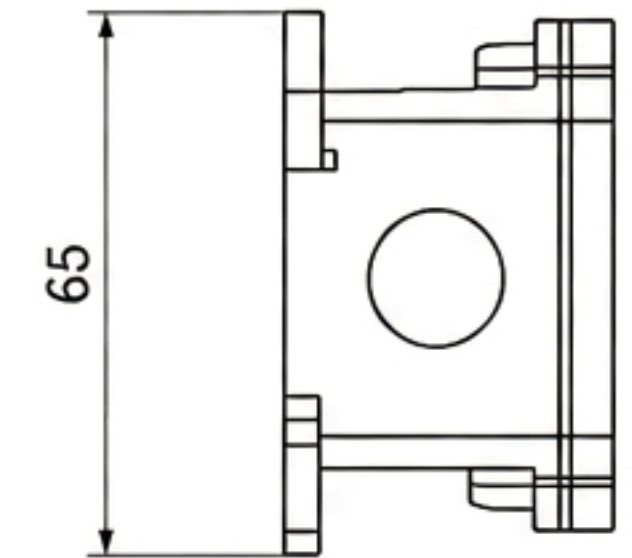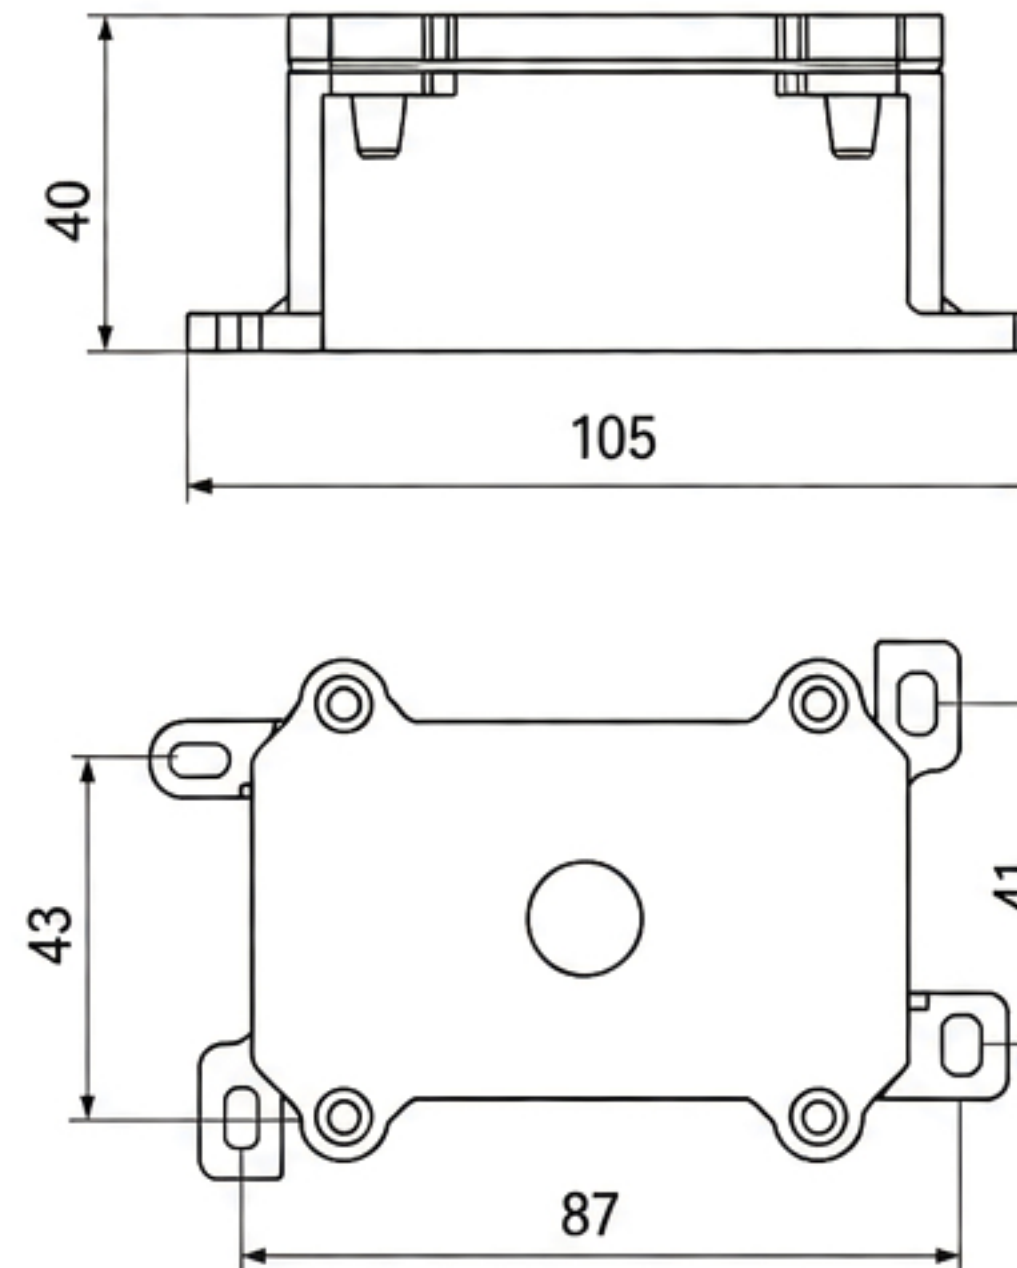

Opening Size
12MM (0.472")



Waterproof
IP65



Durable
High Impact



Precision
SGS Quality



Reliable
Long Life

FILN
Enjoy happy technology